



Bs-Temperature



Property	Value	Temperature (°C)	Value	Temperature (°C)
Initial permeability μ_i	1200 ± 25%	25°C	120	25°C
Saturation magnetic flux density B_{50}	520	25°C	100	25°C
Remanence B_r	119 A/m	40°C	100	40°C
Coercivity H_c		100°C	80	100°C
Core loss p_{cv} (kW/m ³)		25°C	450	25°C
		40°C	400	40°C
		100°C	300	100°C
		25°C	250	25°C
		40°C	225	40°C
		100°C	150	100°C
Curie temperature T_c (°C)			270	
Electrical resistivity ρ (Ω·m)				
Density d (kg/m ³)			4.7×10^3	

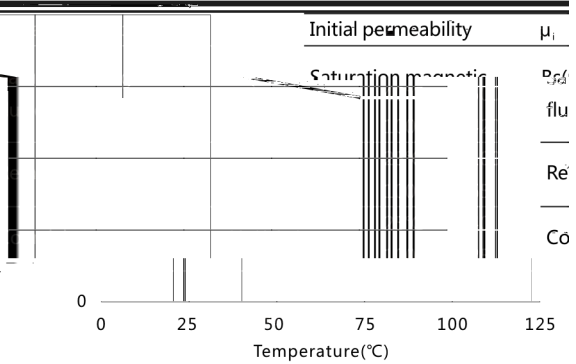


μ_i -Temperature

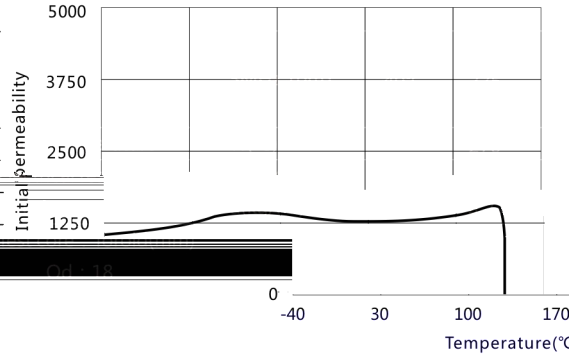

B-H

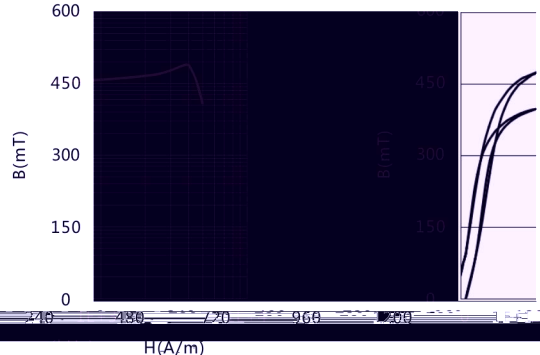

μ_i -Frequency

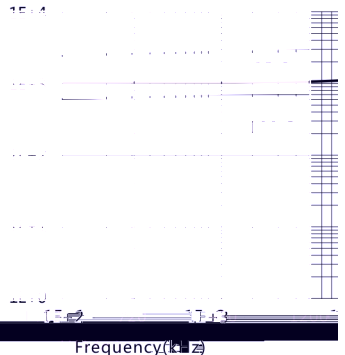

ID : 8
 H : 5
 240 310
 0 210 420 630 840 1050
 0 150 300 450 600
 0 25 50 75 100 125
 0 1250 2500 3750 5000
 -40 30 100 170
 0 210 420 630 840 1050
 0 150 300 450 600
 0 25 50 75 100 125

