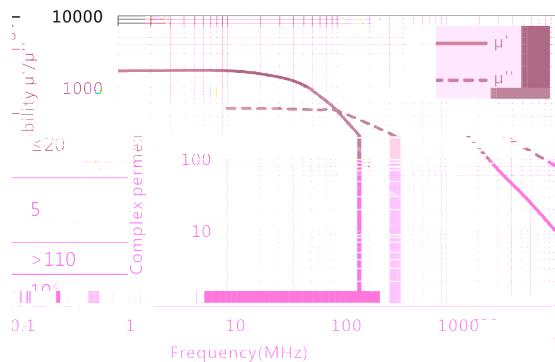


Complex permeability vs. Frequency

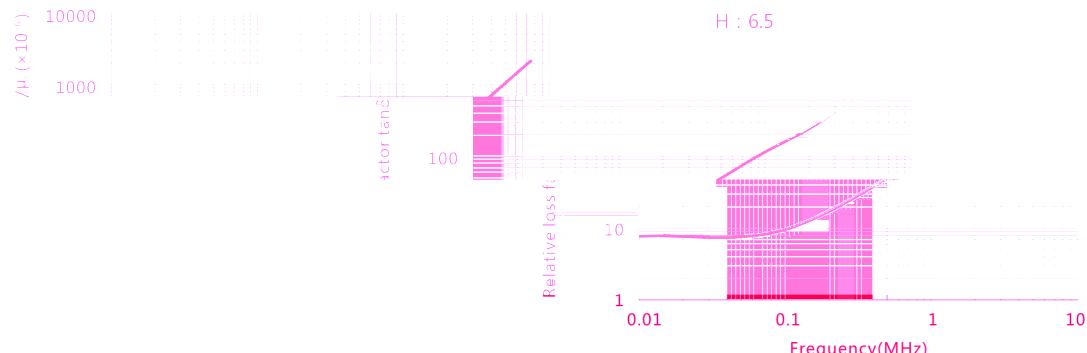
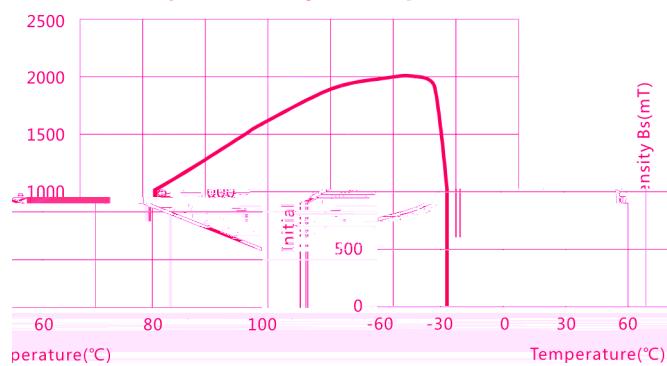
Initial permeability	μ_i	25°C	$1500 \pm 20\%$
Saturation magnetic flux density	B_s (mT)	25°C	300
Relative loss factor	$\tan\delta/\mu$	25°C	$\times 10^3$
100kHz		($\times 10^3$)	25°C
Relative temperature coefficient	α_{μ_i}	($\times 10^6/^\circ\text{C}$)	$20 \sim 60^\circ\text{C}$
Curie temperature	T_c (°C)		
Electrical resistivity	ρ (Ωcm^2)		1

Test core : Toroid(mm)

OD : 12.7

ID : 7.0

H : 6.5

Relative loss factor vs. Frequency**Initial permeability vs. Temperature****Flux density vs. Temperature**